


KONCENTRIČNI LEPTIRASTI ZATVARAČ KONZENTRISCH Absperrklappe CONCENTRIC BUTTERFLY VALVE

Art N°
V3-08 D

NAZIVNI PROMJER NENNWEITE NOMINAL SIZE	NAZIVNI TLAK NENNDRUCK PRESSURE RATING	PRIRUBNICE FLANSHE FLANGES EN 1092-2	VODNI ISPITNI TLAK PREMA EN 12266 WASSERPRÜFDRUCK NACH EN 12266 TEST PRESSURE ACC. TO EN 12266 bar	
			KUČIŠTE GEHAUSE BODY	ZATVORENO GESCHLOSSEN CLOSED
DN	PN bar	bar	15	11
150 – 1200	10	10		

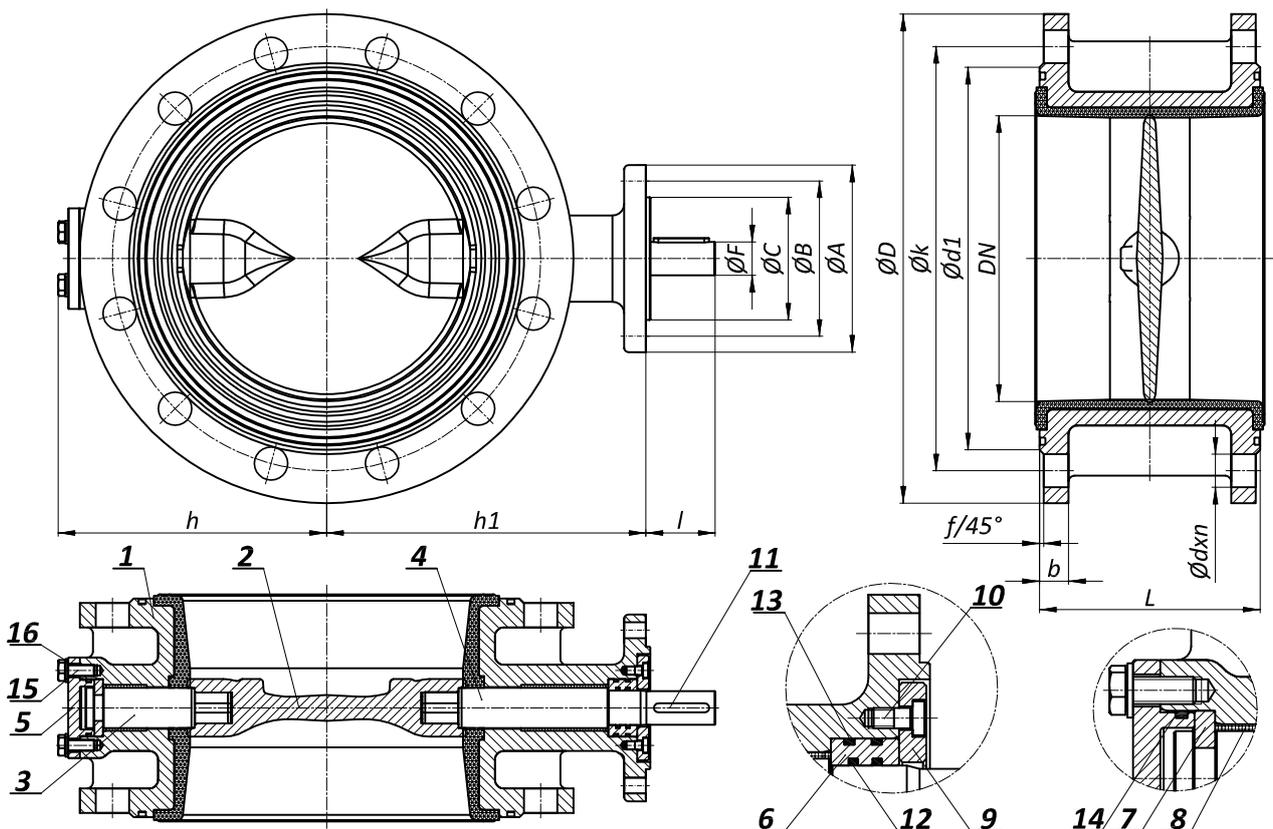

STANDARDNA NAMJENA: PITKA VODA DO 65°C
STANDARD VERWENDUNG: TRINKWASSER BIS ZU 65°C
STANDARD APPLICATION: POTABLE WATER UP TO 65°C

Ugradbena mjera: EN 558 SERIJA 13
Baulängenreihe: EN 558 SERIES 13
Face to face: EN 558 SERIES 13

Površinska zaštita C4H prema ISO 12944
Beschichtung C4H nach ISO 12944
Coating C4H according ISO 12944


Unutarnja zaštita: gumirano
Interner Schutz: gummierte
Inside protection: rubberlined

MAX. RADNA TEMPERATURA: 65°C (ostalo na upit)
MAX. ARBEIT TEMPERATUR: 65°C (Andere auf Anfrage)
MAX. WORKING TEMPERATURE: 65°C (other on request)

Ostali mediji / aplikacije ili površinska zaštita na upit
Andere Medium / Verwendung oder beschichtung auf Anfrage
Other medium / application or coating on request

Dozvoljeni radni tlak vrijedi za oba smjera.
Die zulässigen Betriebsdrücke gelten für beide Richtungen.
The permissible working pressures are valid for both flow directions.

Prirubnice izvedene za ugradnju prema EN 1092-2 ili na zahtjev prema ostalim standardima.
Einbaufansche nach EN 1092-2 oder auf Anfrage nach andere Standard.
Installation flanges according to EN 1092-2 or on request according to other standard.

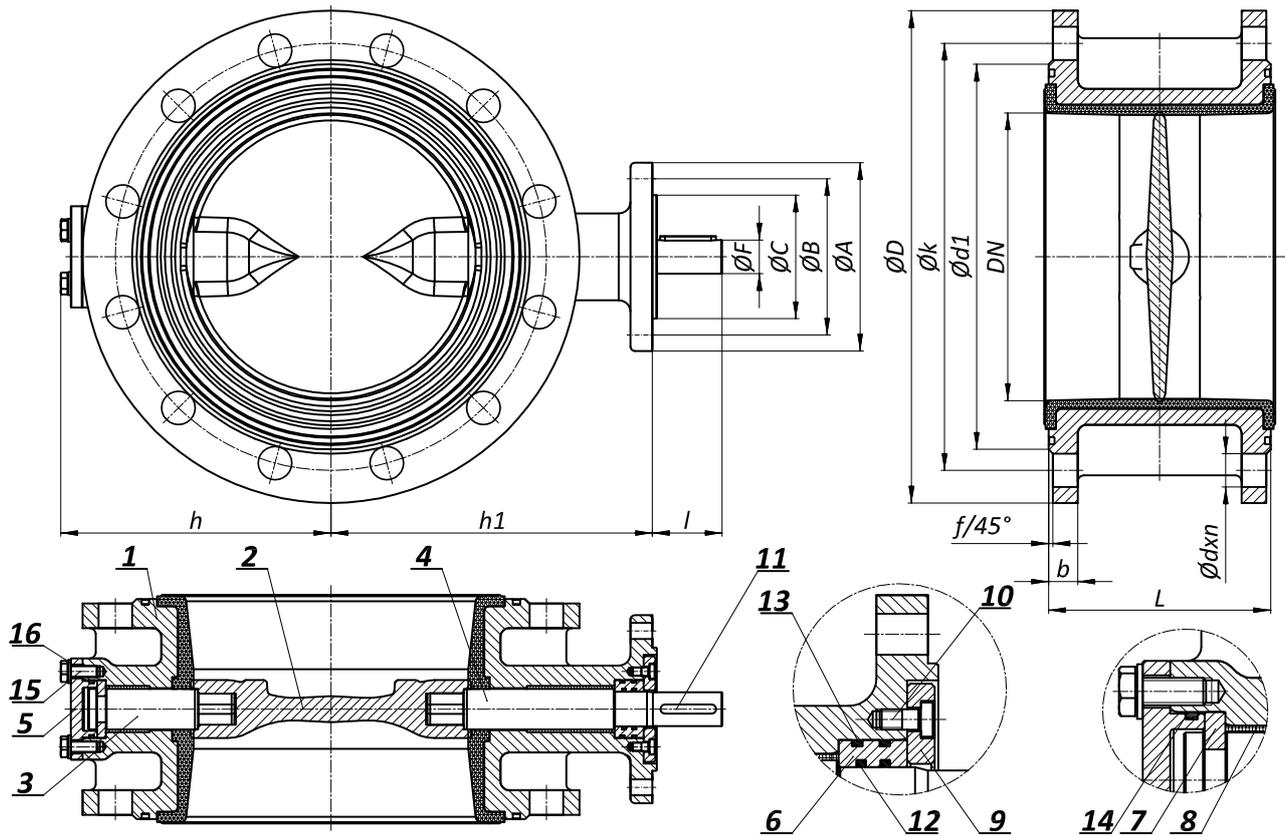

POZICIJA POSITION POSITION	NAZIV POZICIJE	TEIL	PART	MATERIJAL MATERIAL MATERIAL
1	Kućište	Gehäuse	Body	EN-GJS-400-15
2	Disk	Disc	Disc	X2CrNiMoN 22-5-3
3	Osovina	Achse	Shaft	X2CrNiMoN 22-5-3
4	Vratilo	Welle	Driven Shaft	X2CrNiMoN 22-5-3
5	Poklopac	Deckel	Cover	EN-GJS-400-15
6	Brtvenica	Dichtungbuchse	Sealing bush	CC480K
7	Dvodijelni prsten	Axiallager	Axial bearing	CC480K
8	PAP ležaj	PAP Lager	PAP bearing	PTFE / NIRO
9	Poklopac brtvenice	Dichtungbuchse Deckel	Sealing bush cover	EN-GJS-400-15
10	Vijak	Schraube	Screw	A4
11	Pero	Passfeder	Parallel key	X2CrNiMoN 22-5-3
12	"O" brtva	"O" Ring	"O" ring	EPDM
13	"O" brtva	"O" Ring	"O" ring	EPDM
14	"O" brtva	"O" Ring	"O" ring	EPDM
15	Vijak	Schraube	Screw	A4
16	Podložna pločica	Schaube	Washer	A4


* standardni materijali
* ostali materijali na upit

* Standardwerkstoffe
* Andere Werkstoffe auf Anfrage

* standard materials
* other materials on request

Art N°
V3-08 D

KONCENTRIČNI LEPTIRASTI ZATVARAČ
KONZENTRISCH ABSPERRKLAPPE
CONCENTRIC BUTTERFLY VALVE

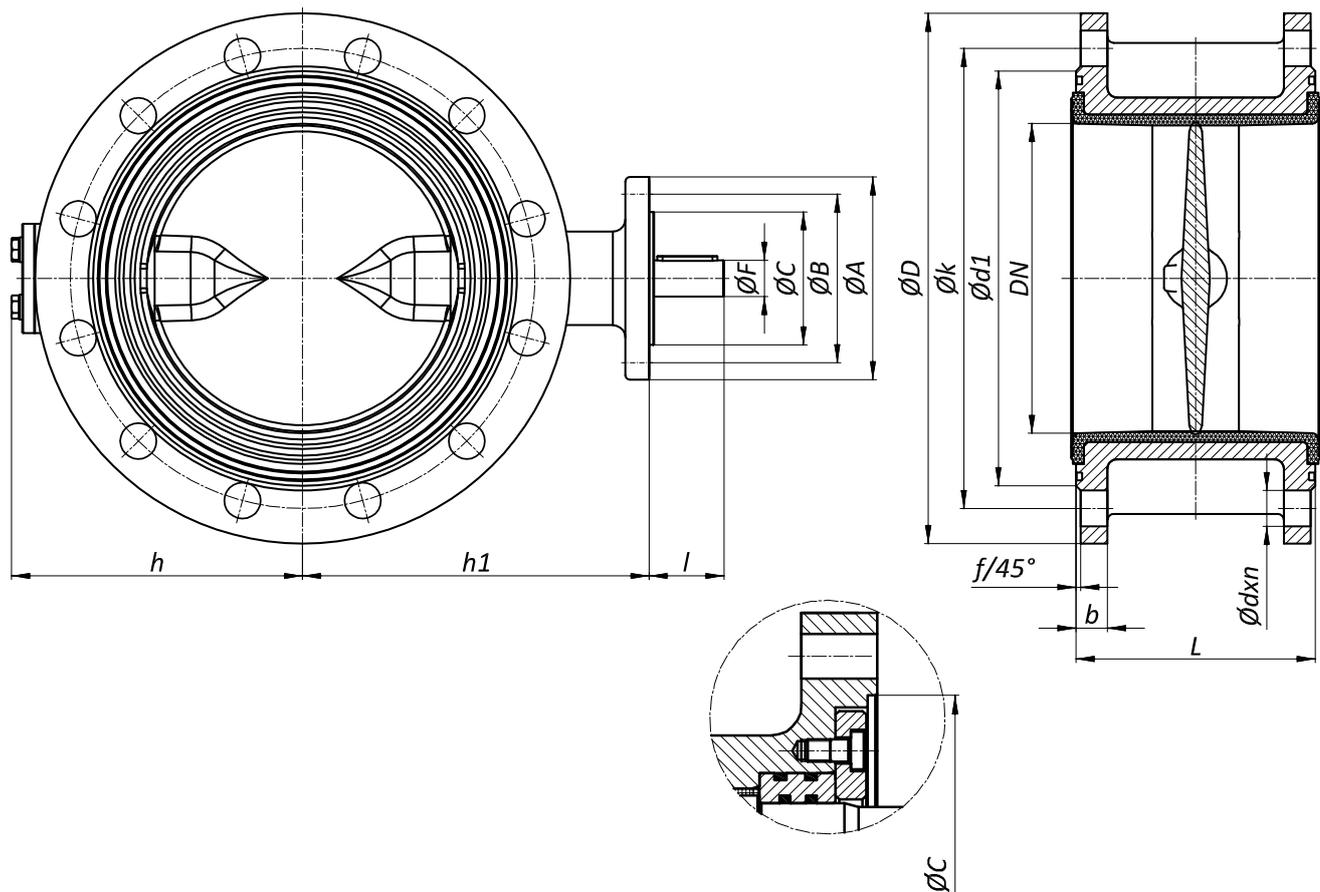

PN 10

DN 700 - DN 1200

DN	L	D	k	d ₁	d	n	b	f	h	h ₁	A	B	C	F	I	MOMENT NA IZLAZNOM VRATILU DREHMOMENT AN AUSGANGWELLE OUTPUT SHAFT TORQUE Nm	m (kg)
150	140	285	240	211	23	8	19	3	155	255	90	70	55	18	40	105	21
200	152	340	295	266	23	8	20	3	185	220	125	102	85	22	45	155	31
300	178	445	400	370	23	12	24,5	4	248	285	125	102	85	28	55	330	59
450	222	615	565	530	28	20	25,5	4	348	385	175	140	115	40	75	850	126
600	267	780	725	682	31	20	30	5	495	490	210	165	140	60	100	2100	248
900	330	1115	1050	1001	34	28	37,5	5	699	678	300	254	200	85	110	6900	600
1200	470	1455	1380	1328	41	32	45	5	893	1045	350	298	230	98	140	19100	1255

Ostali profili na upit.

Andere Nennweite auf spezielle Bestellung.

Other nominal sizes on special application.