


Pressure retention valve DAV for monitoring third-party pressure

1405

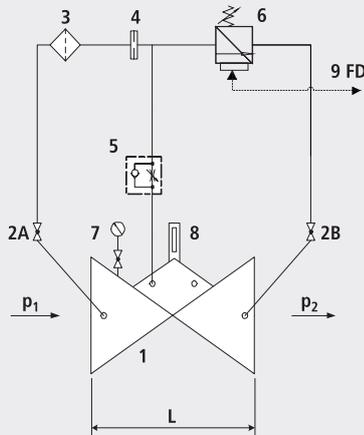

Components

- 1: Main valve
- 2: Ball valve (A, B)
- 3: Filter
- 4: Orifice
- 5: Throttle check valve
- 6: Control valve
- 7: Pressure gauge with ball valve
- 8: Optical position indicator (optional: Electrical position indicator, opening limiter)
- 9: Control valve with relief is controlled with external pressure

Application

- To use in drinking water systems (other media after consultation)
- As an open/shut valve with hydraulic control (e.g. sprinkler systems)
- Maintaining a network pressure

Mode of operation

- The pressure-sustaining valve opens quickly via the control line of the external pressure and closes slowly when the external pressure lowers. So that the control valve can be relieved again after pressurisation (and the main valve closes again), it must be possible to relieve the control line of the external pressure. The pressure of the control line (external pressure) should be within the range of 2 to 16 bar.

Product information

- To calculate the dimensions of the valve please refer to the following information:
- Maximum and minimum inlet pressure (static and dynamic pressure ratios)
- Desired maximum loss of pressure
- Level of the external pressure
- Maximum and minimum flow rates
- Available line diameters and lengths
- Construction of the valve (straight or angle design)
- For the calculation basis, information on the loss of pressure and the characteristic values of the valve, please refer to the end of Chapter E.

Installation and assembly

- Shut-off valves should be fitted on both sides of the valve and a dirt trap should be installed on the inlet side of the valve. Depending on the installation situation, a mounting/dismounting adapter should be provided.

Artikel-Nr.	DN	PN	L	kg
1405007000	1 1/2"	16	210	11.000
1405008000	2"	16	210	11.000
1405040000	40	16	200	15.750
1405050000	50	16	230	16.250
1405065000	65	16	290	21.300
1405080000	80	16	310	27.400
1405100000	100	16	350	35.400
1405125000	125	16	400	51.500
1405150000	150	16	480	76.000
1405200000	200	10	600	114.600
1405200016	200	16	600	114.600
1405250000	250	10/16	730	247.000
1405300000	300	10/16	850	359.000