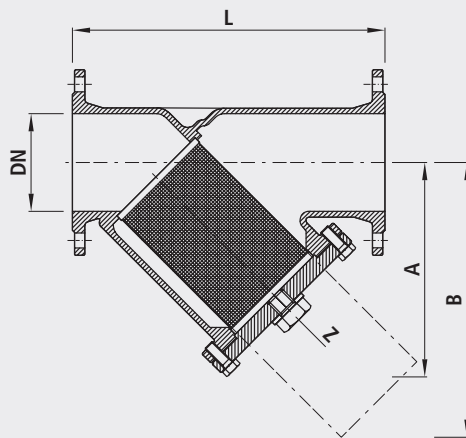


## Dirt trap, PN 10/16

2001

**Characteristics**

- Construction length acc. to DIN EN 558
- Flange dimensions acc. to DIN 1092-2
- Medium temperature 2 to 40°C

**Material**

- Housing and cover: GJL-250
- Filter: INOX double sieve

**Spare parts**

- Sieve inserts standard, Mesh width 0.5 mm (No. 2051)
- Sieve inserts irrigation, Mesh width 2 mm or 5 mm (No. 2056), other cuff widths on request
- Cover seal (No. 2092)
- Plug and plug seal (No. 2093)

Artikel-Nr.	DN	PN	L	A	B	Z	kg	NPK No. 411
2001040000	40	16	200	150	240	1"	8.600	842115
2001050000	50	16	230	160	250	1"	10.900	842116
2001065000	65	16	290	180	285	1"	16.400	842117
2001080000	80	16	310	215	330	1"	23.000	842118
2001100000	100	16	350	235	365	1½"	29.500	842119
2001125000	125	16	400	280	425	1½"	42.600	842141
2001150000	150	16	480	320	480	1½"	55.000	842142
2001200000	200	10	600	405	610	1½"	106.000	842143
2001200016	200	16	600	405	610	1½"	106.000	
2001250000	250	10	730	540	915	1½"	173.000	
2001250016	250	16	730	540	915	1½"	173.000	
2001300000	300	10	850	680	1110	1½"	279.000	
2001300016	300	16	850	680	1110	1½"	279.000	